

110 SC Series

ELCAST
LIGHTING



ELCASTLTG@ELCASTLTG.COM

815 S Kay Avenue Addison
IL, 60101 USA

P 630 543 5390
F 630 543 5392

Catalog Number	
Project/Location	Type
Approved By	

110 SC SERIES

LED, HID, CFL ARCHITECTURAL WALL MOUNT

HOUSING

Heavy-duty, corrosion resistant die-cast aluminum housing.

FRAME

Heavy-gauge, zinc plated, formed steel secured to housing with stainless steel tamper proof hardware.

GASKET

Closed cell silicone foam gasket seals out moisture, dust, and insects for weather-tight operation.

LENS

One-piece opal white, impact resistant UV stabilized or frosted glass.

BALLAST

- CF: electronic, thermally protected high power factor
- HID: electronic, thermally protected 120/277V or magnetic core and coil
- LED: solid state electronic driver

SOCKET

- CF: four pin plug-in type
- HID: 4KV pulse rated nickel plated shell medium base

MOUNTING

Surface wall or ceiling over standard J-box.

FINISH/COLOR



Polyester powder coat finish over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color (CC).

OPTIONS



- F1 single fuse
- PC photo cell
- QRS quartz re-strike
- ETR emergency ballast remote (CFL)
- ETI emergency ballast integral (CFL)
- ETBP extreme temperature battery pack
- CF color filters
- CLF custom laser cut frames

ETL listed suitable for wet location.
Conforms to UL Standard 1598.

Series	Lamp	Wattage/MAX
110SC	2/PLC	26W
	2/PLC	32W
	HPS	100W
	PSMH	100W
	LED	21W



FRAME OPTIONS 110 SC-1

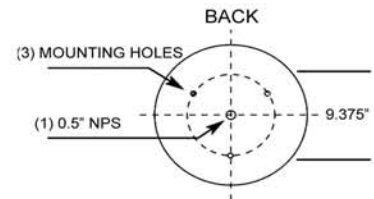

Ordering Example



Specifications are subject to change without notice. Consult factory for verification.

ELCAST LIGHTING

815 S KAY AVE ADDISON, IL 60101 USA
630.543.5390 • FAX: 630.543.5392

elcastltg@elcastltg.com • www.elcastltg.com