


# 110STG Series

**ELCAST**  
LIGHTING



Catalog Number	
Project/Location	Type
Approved By	

# 110 STG SERIES

**LED, INDUCTION, HID, CFL ARCHITECTURAL WALL/CEILING MOUNT**

**HOUSING**

Heavy-duty, corrosion resistant die-cast aluminum housing. Housing and decorative frames. Stainless steel tamper proof hardware.

**GASKET**

Closed cell silicone foam gasket seals out moisture, dust, and insects for weather-tight operation.

**LENS**

One-piece, molded frosted glass.

**BALLAST**

- CF: electronic, thermally protected high power factor
- HID: electronic, thermally protected or magnetic core and coil
- LED: solid state electronic driver
- IND: solid state power generator

**SOCKET**

- CF: four pin plug-in type
- HID: 4KV pulse rated nickel-plated shell medium base




**MOUNTING**

Surface wall or ceiling over standard J-box.

**FINISH/COLOR**

Polyester powder coat finish over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color (CC).

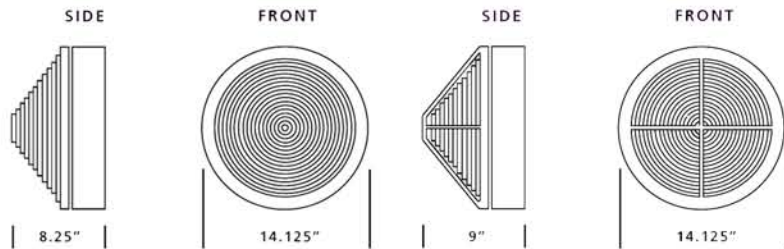


**OPTIONS**

- F1 single fuse
- PC photo cell
- QRS quartz re-strike
- ETR emergency ballast remote (CFL)
- ETI emergency ballast integral (CFL)
- ETBP extreme temperature battery pack
- CM ceiling mount


ETL listed suitable for wet location. Conforms to UL Standard 1598.

Series	Lamp	Wattage/MAX
110STG	2/PLC	42W
	HPS	150W
	PSMH	150W
	LED	28W
	IND	55W

**FRAME OPTIONS**

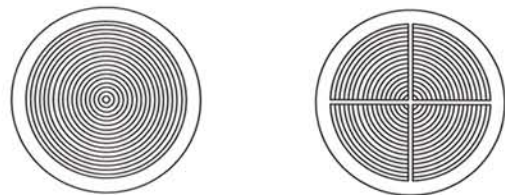

OPEN - guard option O      WITH GUARD - guard option G

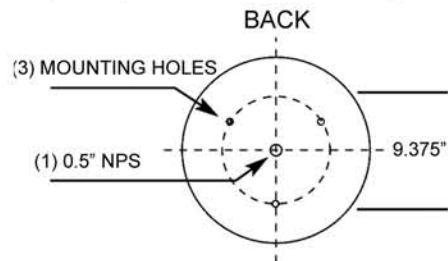

**Ordering Example**



**ELCAST**LIGHTING

815 S KAY AVE ADDISON, IL 60101 USA  
630.543.5390 • FAX: 630.543.5392  
elcastltg@elcastltg.com • www.elcastltg.com

Specifications are subject to change without notice. Consult factory for verification.