

1400 Series

ELCAST
LIGHTING



ELCASTLTG@ELCASTLTG.COM

815 S Kay Avenue Addison
IL, 60101 USA

P 630 543 5390
F 630 543 5392



1400 Series

Catalog Number	
Project/Location	Type
Approved By	

LED, HID, CFL MINI QUARTER SPHERE WALL MOUNT

APPLICATION

Wall mount direct or indirect luminaire specifically designed to provide glare free high performance illumination. Available as bollard mount for building or landscape uniformity. See bollard/pathway section.

HOUSING

Heavy-duty, corrosion resistant die cast aluminum.

LENS

Tempered 1/8" thick clear glass, retained with die cast aluminum door frame. Frame secured to housing with tamper resistant, stainless steel hardware.

GASKET

Closed cell silicone foam gasket seals out moisture, dust, and insects for weather-tight operation.

BALLAST

CF: integral electronic high power factor

SOCKET

CF: four pin plug in type

MOUNTING

Surface wall over STD J-Box.


FINISH/COLOR

Polyester powder coat over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color(CC).

OPTIONS


- F1 single fuse
- ET extreme temperature
- ETR emergency ballast remote

ETL listed suitable for wet location.
Conforms to UL Standard 1598.

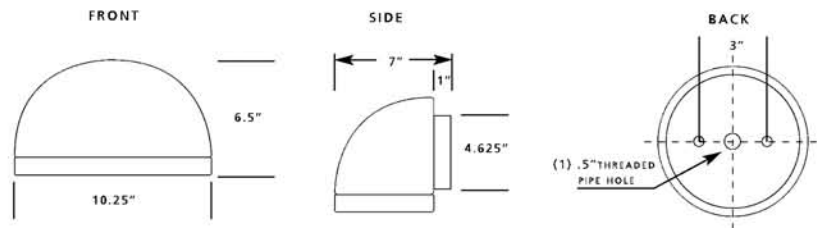

Series	Lamp	Wattage/MAX
1400	PLC LED	18W 10W

MOUNTING STYLES

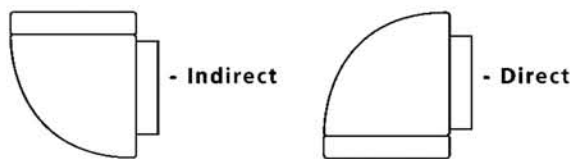

Ordering Example

1400 18PLC 120 MB F1

Specifications are subject to change without notice. Consult factory for verification.

ELCAST LIGHTING

815 S KAY AVE ADDISON, IL 60101 USA
630.543.5390 • FAX: 630.543.5392
elcastltg@elcastltg.com • www.elcastltg.com