

1455 Series

ELCAST
LIGHTING



ELCASTLTG@ELCASTLTG.COM

815 S Kay Avenue Addison
IL, 60101 USA

P 630 543 5390
F 630 543 5392

Catalog Number	
Project/Location	Type
Approved By	

1455 Series

LED, HID, CFL QUARTER SPHERE WALL MOUNT DOWNLIGHT ONLY

HOUSING

Heavy-duty, corrosion resistant die cast aluminum.

LENS

Tempered 1/8" thick clear glass, retained to housing with die cast aluminum door frame. Frame secured to housing with stainless steel hardware.

OPTICAL/REFLECTOR

Formed, one-piece specular aluminum, providing three distributions: FT (forward throw), ST (standard throw), and WT (wide throw).

BALLAST

CF: electronic, thermally protected high power factor
 HID: electronic, thermally protected or magnetic
 LED: solid state electronic driver

SOCKET

CF: four pin plug in type
 HID: 4KV pulse rated nickel plated shell medium base

MOUNTING

"Quick Mount" plate for easy mounting over standard J-Box.


FINISH/COLOR

Polyester powder coat over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color(CC).



OPTIONS

F1 single fuse
 PC photo cell
 TP tamper proof
 QRS quartz restrike
 ETI emergency ballast integral (CFL)
 ETR emergency ballast remote (CFL)
 ETBP extreme temperature battery back
 PVS polycarbonate vandal shield
 SO segmented optics
 EB-LED emergency battery 2 LED modules

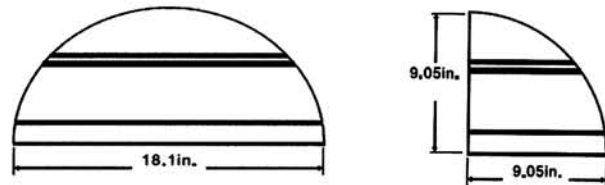

Suitable for wet location. Conforms to UL Standard 1598.

Series	Lamp	Wattage / MAX
1455	PLT	2/42W
	HPS	150W
	PSMH	175W
	LED	28W

Ordering Example

1455-2/42PLT-120-MB-QRS-F1

ELCAST LIGHTING

815 S KAY AVE ADDISON, IL 60101 USA

630.543.5390 • FAX: 630.543.5392

elcastltg@elcastltg.com • www.elcastltg.com