

1470 Series

ELCAST
LIGHTING





1470 Series

Catalog Number	
Project/Location	Type
Approved By	

LED, HID, CFL CUT-OFF WALL SCONCE

HOUSING

Heavy-duty, corrosion resistant die cast aluminum.

LENS

Tempered 1/8" thick clear glass, retained to housing with die cast aluminum door frame. Secured to housing with stainless steel hardware.

GASKET

Closed cell silicone foam gasket seals out moisture, dust, and insects for weather-tight operation.

OPTICAL/REFLECTOR

Formed, one-piece specular aluminum, providing three distributions: FT (forward throw), ST (standard throw), and WT (wide throw).

BALLAST

CF: electronic, thermally protected high power factor
 HID: electronic, thermally protected or magnetic
 LED: solid state electronic driver

SOCKET

CF: four pin plug in type
 HID: 4KV pulse rated nickel plated shell medium base

MOUNTING

"Quick Mount" plate for easy mounting over standard J-Box.

FINISH/COLOR

Polyester powder coat over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color(CC).



OPTIONS

- F1 single fuse
- PC photo cell
- TP tamper proof
- QRS quartz restrike
- ETI emergency ballast integral (CFL)
- ETR emergency ballast remote (CFL)
- ETBP extreme temperature battery pack
- PVS polycarbonate vandal shield
- SO segmented optics
- EB-LED emergency battery 2 LED modules

DISTRIBUTION

- FT forward throw
- ST standard throw
- WT wide throw



Suitable for wet location. Conforms to UL Standard 1598.

Series	Lamp	Wattage / MAX
1470	PLT	2/42W
	HPS	150W
	MH/HPS	175W
	LED	28W

Ordering Example

1470-2/42PLT-120-BZ-QRS-ETI

Specifications are subject to change without notice. Consult factory for verification.

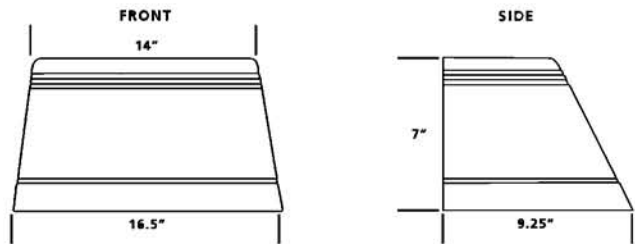

ELCAST LIGHTING

815 S KAY AVE ADDISON, IL 60101 USA
 630.543.5390 • FAX: 630.543.5392
elcastltg@elcastltg.com • www.elcastltg.com