

1490 LED Series 14" & 18"

ELCAST
LIGHTING



ELCASTLTG@ELCASTLTG.COM

815 S Kay Avenue Addison
IL, 60101 USA

P 630 543 5390
F 630 543 5392

1490 SERIES

14"- 28 W & 18"- 56 W

LED CUT-OFF WALL SCONCE

Catalog Number	
Project/Location	Type
Approved By	

HOUSING

Heavy-duty, corrosion resistant die cast aluminum.
Three 1/2" threaded conduit entrances.

LENS

Clear, tempered glass lens retained to housing with die-cast aluminum door frame. Lens frame secured to housing with stainless steel tamper proof hardware.

GASKET

Silicone gasket seals out moisture, dust, and insects for weather-tight operation.

MOUNTING

Wall mount over standard J-box. Can be mounted Up or Down.

FINISH/COLOR

Polyester powder coat over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color (CC).

OPTIONS

- F1 single fuse
- PC photo cell
- PVS polycarbonate vandal shield
- IMS integral motion sensor
- IBLS integral bi-level motion sensor (56W LED only)
- EB-LED emergency battery 2 LED modules

DISTRIBUTION

- FT forward throw
- ST standard throw
- WT wide throw

DRIVER - ELECTRICAL SPECIFICATION


Solid-state electronic driver.

28W

Input Voltage Range: 90-305 VAC-47 to 63 Hz
 Power Factor: 99% @ 110 VAC, 94% @220 VAC
 Input Current: 0.48 A @ 110 VAC, 0.23 A @ 220 VAC
 Inrush Current: 20 A @ 230 VAC, 25 C Cold Start
 Line Regulation: 2%
 Load Regulation: 5%
 Protection: Output Over-Voltage,
 Output Over-Current,
 Output Short Circuit Protection with Auto Recovery
 Lumens Output: 2240-2520
 CW: 5000K
 Lamp Life: 50,000 HRS - 3 Year Limited Warranty

56W

Input Current: 0.96 A @ 110 VAC, 0.46 A @ 220 VAC
 Lumens Output: 4480-5040
 CW: 5000K
 Lamp Life: 50,000 HRS - 3 Year Limited Warranty

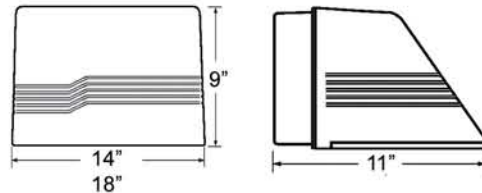

Ordering Example



Specifications are subject to change without notice. Consult factory for verification.

ELCASTLIGHTING

815 S KAY AVE ADDISON, IL 60101 USA
 630.543.5390 • FAX: 630.543.5392
elcastltg@elcastltg.com • www.elcastltg.com