

1495 Series

ELCAST
LIGHTING



ELCASTLTG@ELCASTLTG.COM

815 S Kay Avenue Addison
IL, 60101 USA

P 630 543 5390
F 630 543 5392

Catalog Number	
Project/Location	Type
Approved By	

1495 SERIES

LED, HID, CFL UP OR DOWN, FULL-CUTOFF DOWN WALL SCONCE

HOUSING

Heavy-duty, corrosion resistant die-cast aluminum.

LENS

Tempered 1/8" thick clear glass. Retained to housing with die-cast aluminum door frame. Frame secured to housing with stainless steel hardware.

GASKET

Closed cell silicone foam gasket seals out moisture, dust, and insects for weather-tight operation.

OPTICAL/REFLECTOR

Chemically brightened, highly specular reflector system providing three distributions (see below).

BALLAST

- CF: electronic, thermally protected high power factor
- HID: electronic, thermally protected or magnetic
- LED: solid state electronic driver

SOCKET

- CF: four pin plug-in type
- HID: G12 BI-PIN 4KV pulse rated or 4KV pulse rated nickel plated shell medium base



MOUNTING

"Quick mount plate" for easy mounting over standard J-box.

FINISH/COLOR

Polyester powder coat over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color (CC).


OPTIONS

- F1 single fuse
- PC photo cell
- TP tamper proof
- QRS quartz restrike
- ETR emergency ballast remote (CFL)

DISTRIBUTION

- V symmetrical
- FT forward throw
- N narrow 1x1 beam

Suitable for wet location. Conforms to UL Standard 1598. Protection rated IP65

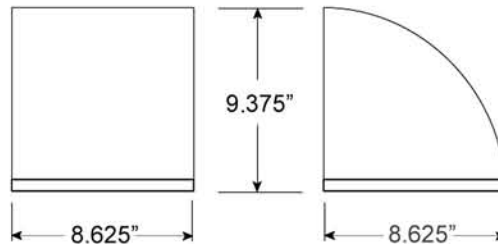

Series	Lamp	Wattage / MAX
1495	PLCE	32PLT
	HPS	70W
	PSMH	70W
	LED	28W

Ordering Example



Specifications are subject to change without notice. Consult factory for verification.

ELCASTLIGHTING

815 S KAY AVE ADDISON, IL 60101 USA
630.543.5390 • FAX: 630.543.5392

elcastltg@elcastltg.com • www.elcastltg.com