

333 Series

ELCAST
LIGHTING



ELCASTLTG@ELCASTLTG.COM

815 S Kay Avenue Addison
IL, 60101 USA

P 630 543 5390
F 630 543 5392

Catalog Number	
Project/Location	Type
Approved By	

333 SERIES WALL MOUNT CUT-OFF

LED, CFL

HOUSING

Heavy-duty, corrosion resistant die cast aluminum. Stainless steel hardware.

GASKET

Closed cell silicone foam gasket for weather-tight operation.

LENS

Tempered opal 1/8 thick. Retained to housing with die cast frame.

BALLAST

CFL: Integral electronic fluorescent 120/277V
LED: solid state electronic driver

SOCKET

CF: four pin plug in type

MOUNTING

Surface wall over standard J-box.



FINISH/COLOR

Polyester powder coat finish over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color (CC).

OPTIONS

F1 single fuse
ETR emergency ballast remote only (CFL)
PCB button photo control
SC surface mount conduit entry

Suitable for wet location.
Conforms to UL Standard 1598.

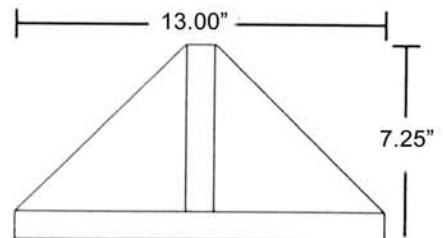

Series	Lamp	Wattage
333	PLC LED	26W 10W (6W Standard)

Ordering Example

333 LED 120 SG F1

Specifications are subject to change without notice. Consult factory for verification.