

5000 Series

ELCAST
LIGHTING



Catalog Number	
Project/Location	Type
Approved By	

5000 SERIES WALL SCONCE

LED, CFL ARCHITECTURAL WALL SCONCE

HOUSING

Heavy gauge formed aluminum. Decorative frames shall be made from extruded aluminum. Stainless steel hardware. Custom designed frames available.

GASKET

Closed cell silicone foam gasket seals out moisture, dust, and insects for weather-tight operation.

LENS

1/8" thick, triangular shaped, opal acrylic. Provides shadow-free illumination.

BALLASTS

CF: electronic, thermally protected high power factor 120/277
LED: solid state electronic driver

SOCKET

CF: four pin plug-in type

MOUNTING

Surface wall mount.

FINISH/COLOR


Polyester powder coat finish over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color (CC).




OPTIONS

- F1 single fuse
- D dimming
- ETI emergency ballast in separate back box
- ETR emergency ballast remote only (CFL only)
- LED-ETR emergency ballast remote (LED only)

Suitable for wet location.
Conforms to UL Standard 1598.

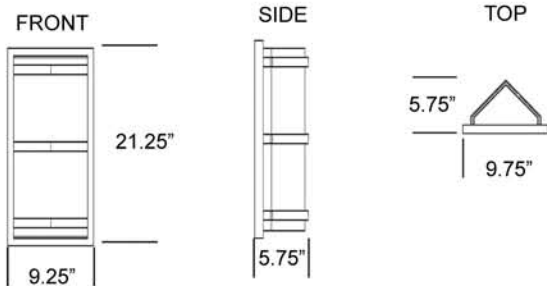

Series	Lamp	Wattage/MAX
5000	2/PLC	18W
	2/PLC	26W
	2/PLC	42W
	BX	36W
	BX	39W
	LED	consult factory

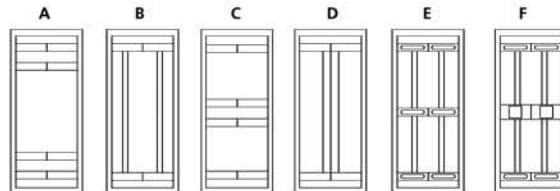

Ordering Example

5000 C 36BX 120 SG ETR

ELCASTLIGHTING

815 S KAY AVE ADDISON, IL 60101 USA
630.543.5390 • FAX: 630.543.5392
elcastlgt@elcastlgt.com • www.elcastlgt.com