

600 Series

ELCAST
LIGHTING



600 SERIES

Catalog Number	
Project/Location	Type
Approved By	

LED, HID, CFL ARCHITECTURAL WALL MOUNT

HOUSING

Heavy-duty, die cast aluminum housing and frame. Special grip type latch and hinged frame assembly for quick & easy maintenance. Stainless steel external hardware.

GASKET

Closed cell silicone foam gasket seals out moisture, dust, and insects for weather-tight operation.

BALLAST

CF: electronic thermally protected high power factor
 HID: electronic thermally protected magnetic core and coil
 LED: solid state electronic driver

SOCKET

CF: four pin plug in type
 HID: 4KV pulse rated medium base for HPS

MOUNTING

Surface wall over STD J-box.

FINISH/COLOR



Polyester powder coat over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color (CC).

OPTIONS


F1 single fuse
 PC photo cell
 QRS quartz restrike
 ETR emergency ballast remote only (CFL)

ETL listed suitable for wet location.
 Conforms to UL Standard 1598.

Series	Lamp	Wattage/MAX
600	A-19	75W
	PLT	42W
	HPS	100W (medium base)
	MHPS	100W (T6-G12)
	LED	28W

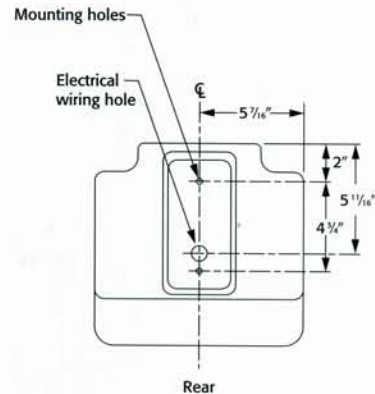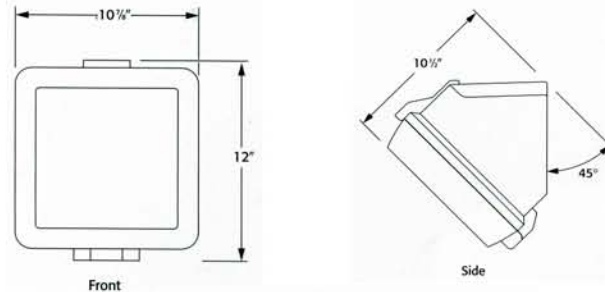

Ordering Example



Specifications are subject to change without notice. Consult factory for verification.

ELCAST LIGHTING

815 S KAY AVE ADDISON, IL 60101 USA

630.543.5390 • FAX: 630.543.5392

elcastlgtg@elcastlgtg.com • www.elcastlgtg.com