

812AL Series

ELCAST
LIGHTING



ELCASTLTG@ELCASTLTG.COM

815 S Kay Avenue Addison
IL, 60101 USA

P 630 543 5390
F 630 543 5392

Catalog Number	
Project/Location	Type
Approved By	

812AL SERIES

LED, HID, CFL ARCHITECTURAL RECESSED & SURFACE WALL MOUNT

HOUSING

Heavy-duty, corrosion resistant, die-cast aluminum. Provided with 1-3/4" KO.
Decorative die-cast aluminum frames.
All external hardware shall be stainless steel.

GASKET

Closed cell silicone foam gasket. Seals out moisture, dust, and insects for weather-tight operation.

LENS

One piece, molded opal white, impact resistant, UV stabilized polycarbonate lens.

BALLAST

- CF: electronic, thermally protected high power factor 120/277
- HID: electronic, thermally protected high power factor 120/277 or magnetic core and coil
- LED: solid state electronic driver

SOCKET

- CF: four pin plug-in type
- HID: 4KV pulse rated, nickel plated shell medium base



MOUNTING

Recessed and surface wall mount.


FINISH/COLOR

Polyester powder coat over zinc based primer. Available in matte black (MB), matte bronze (BZ), matte white (MW), silver gray (SG), or custom color (CC).

OPTIONS

- F1 single fuse
- PC photo cell (surface mount only)
- S surface mount box
- ETI emergency ballast in separate back box
- ETR emergency ballast remote (CFL only)
- LED-ETR emergency ballast remote (LED only)

ETL listed suitable for wet location.
Conforms to UL Standard 1598.

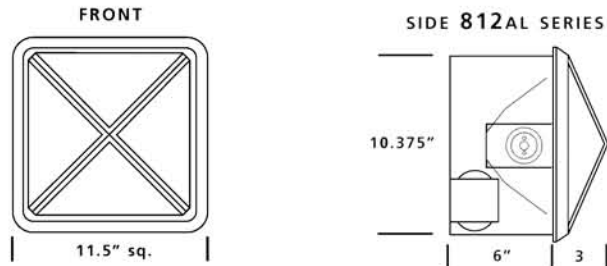

Series	Lamp	Wattage/MAX
812AL	PLT	2/42W
	HPS	100W
	PSMH	100W
	LED	21W

FRAME OPTIONS



Ordering Example

812AL	1	R OR S	42PLT	120	MB	TP
-------	---	--------	-------	-----	----	----

Specifications are subject to change without notice. Consult factory for verification.

ELCAST LIGHTING

815 S KAY AVE ADDISON, IL 60101 USA
630.543.5390 • FAX: 630.543.5392
elcastltg@elcastltg.com • www.elcastltg.com