

Catalog Number	
Project/Location	Type
Approved By	

CWP-613 SERIES

LED, CFL COMMERCIAL SERIES CUT OFF WALL PACK

HOUSING

Die cast aluminum, corrosion resistant housing. Provided with threaded 1/2" conduit access on three sides.

LENS

Impact resistant polycarbonate lens secured to fixture housing with stainless steel hardware.

REFLECTOR

One piece highly specular aluminum reflector. Choice of light patterns: UD (up/down), D (down), W (wide).

BALLAST

CF: electronic thermally protected high power factor
LED: solid state electronic driver

SOCKET

CF: four pin plug in type

FINISH/COLOR

Bronze polyester powder coat is standard.


OPTIONS

- F1 single fuse
- PC photo cell
- TP tamper proof screws
- STP tamper proof screwdriver
- ETR emergency ballast remote
- ETI emergency ballast integral

DISTRIBUTION


- UD up/down
- D down (full cut-off)
- W wide

Suitable for wet location.
Conforms to UL Standard 1598.

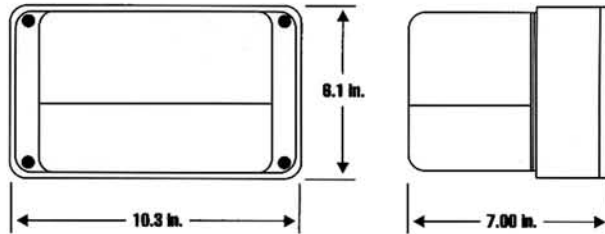

Series	Lamp	Wattage/MAX
CWP-613	PLT	42W
	LED	14W

Light Patterns

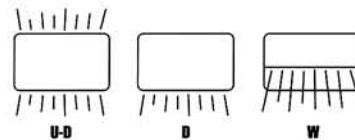

Ordering Example

CWP-613-42PLT-120-BZ-W

Specifications are subject to change without notice. Consult factory for verification.

ELCASTLIGHTING

815 S KAY AVE ADDISON, IL 60101 USA
630.543.5390 • FAX: 630.543.5392
elcastltg@elcastltg.com • www.elcastltg.com